


FP 65 NI

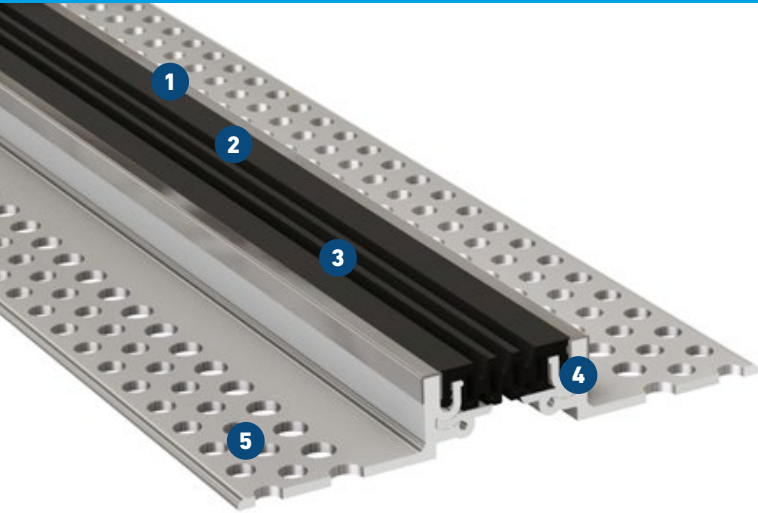

WITH CAPPINGS MADE OF STAINLESS STEEL

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS



- 1 Visible surface in stainless steel**
- 2 Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 3 Multi directional movement**
- 4 High load capacity due to sturdy construction**
Solid aluminium brackets
- 5 MultiHole mounting bracket**
for secure fixing
- 6 Quick and easy installation**
Positive connection of production lengths by means of connection pieces

Expansion joint cover	Joint width	Total movement	Visible width	Total width	Joint height	Load bearing capacity  [kN]	Load bearing capacity*  [kN]
	$b_f \text{ max}$ [mm]	Δb_f [mm]	b_s [mm]	b_t [mm]	h [mm]		
FP 65/21 NI	55	22 (± 11)	67	205	21	30	300
FP 65/31 NI	55	22 (± 11)	67	205	31	30	300
FP 65/51 NI	55	22 (± 11)	67	205	51	30	300

* no continuous use

All information on load bearing capacity does only apply to non-floating floors.

For installation in asphalt, please ask for our technical advice.

Production length: 4 m

Standard colours: black, grey

Wall connections: E3, E4

